




WIRELESS EARPHONES


Accessories

- 1x Pair Wireless Earphones
- 1x Charging Box
- 1x Micro USB Charging Cable
- 2x Pairs of Spare Eartips (Small and Large)
- 1x User's Manual
- 1x Heavy Duty VICTOR case

Product Overview

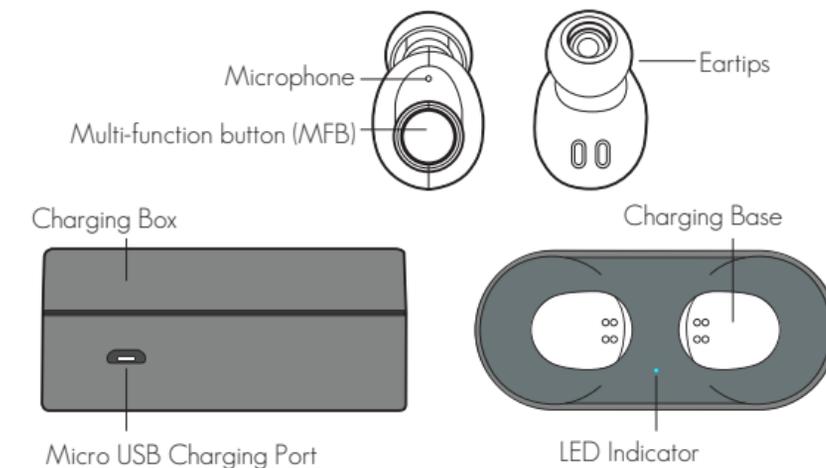

Power On & Pairing

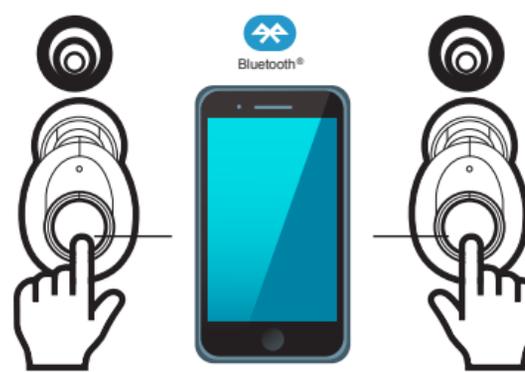

Turn on the left and right earbuds by pressing and holding the MFB on both earbuds for about 3 seconds. The earphones will automatically enter pairing mode. Search the list of available Bluetooth® devices for the name "MPTWE", then select it to connect. The earphones will give the following voice prompts: Power On Connected → Left Channel (Pairing) → Right Channel

TWS Function



The left earphone is the "Master Earphone", with the built-in microphone and hands-free functionality.



Make sure the two earphones are successfully powered on. They will connect automatically.



The right earphone is the "Secondary Earphone", which can be paired with the left one to get stereo sound.



NOTE: Do not cover the earphones with your hand or anything else. Doing so can break the Bluetooth® connection.


Single Mode




Powering On and Pairing the Left Earbud

1. After paired both earbuds, you can put right earbud back into the charging box for charging, then pair the left side to your device. The pairing name is still "MP-TWE". After pairing, the voice prompt will say "connected". You can then play music and make calls using only the left earbud.
2. If the left earbud powers off, turn it on by holding and pressing its MFB for about 3 seconds, then single click the MFB. The earbud will go into pairing mode and the voice prompt will say "Pairing, Pairing". The pairing name is still "MP-TWE". After pairing, the voice prompt will say, "Pairing successful. Connected". You can then play music and make calls using only the left earbud.

Charging

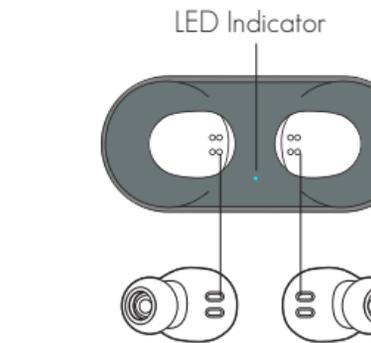

Charging Your Charge Box
The blue LED turns off when the earphones are fully charged. The initial charging time is around 4 hours.

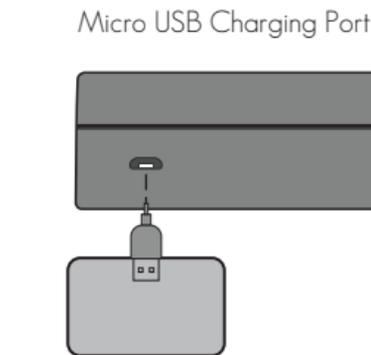

Connect the micro USB cable to the charging box until the blue LED indicator Flashes.



Design, inspection, and final assembly in CAMDEN, N.J.



MADE IN CHINA

SPECIFICATIONS

Model	VICTOR
Bluetooth® Version	V4.2
Supported Profiles	HSP/HFP/A2DP/AVRCP
Wireless Range	up to 32 feet (10 meters)
Earphone Batteries	50mAh x2
Charging Box Battery	500mAh
Talk Time	up to 2 hours
Playing Time	up to 2~ 4.5 hours
Charging Time	about 2 hours
Standby Time	150 hours
Earphone Dimensions (each)	0.8"x0.6"x 0.6" (20x16x15mm)
Earphone Weight (each)	0.1 oz. (3.5g)
Charging Box Dimensions	2.9"x1.3"x1.3" (73x32x32mm)
Charging Box Weight	1.8 oz. (50g)

LED INDICATOR

LED INDICATOR STATUS	
Blue & white flashing alternately	Pairing mode
Blue flashing once every 7 seconds	Connected/Playing music
White flashing twice every 2 seconds	Disconnected
Blue & white flashing twice every 3 seconds	Incoming call (Master Earbud)
Blue flashing once every 3 seconds	In call (Master Earphone)
White flashing once every 5 seconds	Low battery
Whiet	Charging
LED off (after charging)	Fully charged

TIPS

- Ensure that the earphones are fully charged.
- Ensure both the left and right earphones are within 1 foot.
- Turn on both earphones simultaneously by pressing and holding the MFB on both the left and right earphones for about 4 seconds until the LEDs flash blue and white alternately .
- The left and right earphones will be paired with each other.
- When pairing is successful, you will hear the voice prompt "Connected Left Channel/Right Channel". The LED indicators on the earphones with flash blue every 7 seconds.
- Turn on the Bluetooth® function of your device and select "MBTWE" from the device list, then click connect. When Bluetooth is connected successfully, you will hear the voice prompt says "Second Device Connected".

MUSIC AND CALL CONTROL

Streaming Audio

Once paired, you can wirelessly stream audio from your device to your earphones. Music will automatically pause when you receive an incoming phone call and will resume once the call has ended.

Play / Pause	Press the multi-function button once
Next Track	Double-press the multi-function button
Volume Control	You may adjust the volume through your cell phone

Making Calls

Once paired with your smartphone, making and answering phone calls can be managed via the multi-function button.

Answer / End a Call	Press the multi-function button once
Reject an Incoming Call	Double-press the multi-function button
Voice Switch	Double-press the multi-function button during a call to switch between the earphones and your phone for talking

Remark: Phone functions are only activated on the master earphone.

FAQ

- Q: My earphones will not turn on.
A: Please recharge them and make sure they have enough power.
- Q: Why can I only hear music from one of the earphones?
A: Make sure the earphones are synced together:
1. Hold the multi-function button of both units until the LED flashes blue and white alternately.
2. Wait until you hear a voice prompt telling you the two devices are connected.
- Q: What if the right earphone cuts out, but the left one is fine?
A: Please try the reset procedure with both earphones, and then try the Stereo Pairing again.
- Q: The earphones cannot be found or pairing fails.
A: 1. The earphones do not enter the pairing mode, please enable the earphones to enter pairing mode.

2. The Bluetooth® application of the smartphone or device is not operating. Please restart the smartphone or device and restart the pairing process with the earphones.
- Q: What if the sound is unclear?
A: 1. Please try changing the position of your device nearer to the earphones. A direct line of sight is best.
2. Please try the reset procedure on the earphones, you will need to pair them again. We also recommend deleting the pairing with your phone, and then perform the pairing again.

Product Care & Use

Please keep away from liquids and extreme heat.
Do not use earbuds at high volume for extended periods, as this may cause permanent hearing damage or loss.

Warranty & Customer Support

For questions, support, or warranty claims, contact us by email at info@victorrecords.com